





8' 3-part U-Channel Steel Post

Parts Include:

- A. 3 Steel Post segments
- B. 4 nuts
- C. 4 bolts
- D. 8 metal washers

Optional Tools Needed:

- Post Hole Driver
- Socket Driver or Adjustable Wrench
- Level

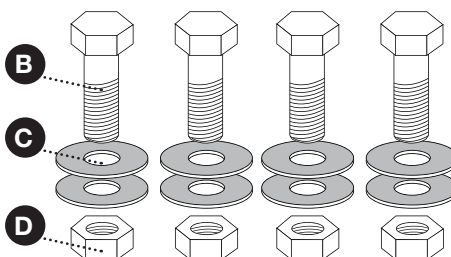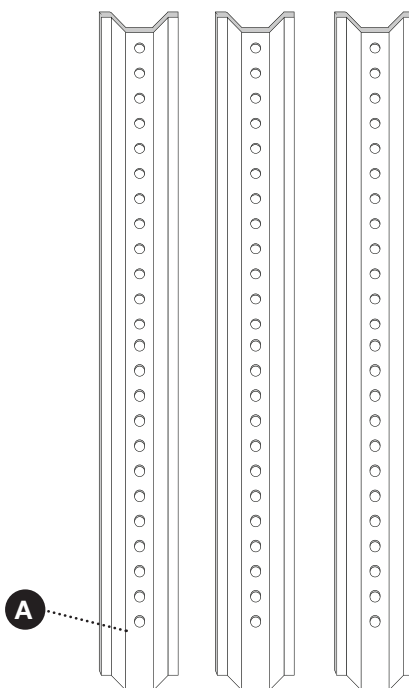

3-part U-Channel Post E19

Note: Poles may also be installed in concrete. Please follow the recommended instructions from the manufacturer.


PET WASTE ELIMINATOR'S STEEL POST:

- ★ Assembles in minutes!
- ★ Weather-Resistant and Maintenance-Free

Pole Assembly and Installation

Leave 3 holes between bolts.

Overlap the pole segments by 5 holes and secure with nuts and bolts. Make sure bolts are on the concave side of the post. Ensure the middle section is under the top and bottom sections.

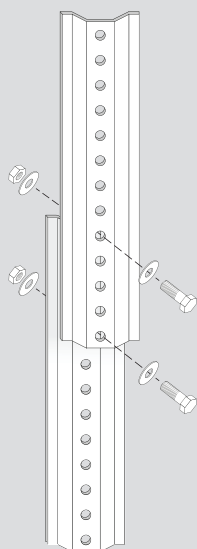

1. Using a post hole driver (not included), drive one of the three sign post segments (A) approximately 15-18" into the ground. Make sure that the "hollow" or "recessed" side of the post is facing where you want the front of the unit to face. We recommend that the pole is no less than 15" underground to support the weight of items attached to the pole properly. Use a level (not included) to ensure the pole is standing upright and will properly support the intended weight. Adjust if necessary.

2. Connect a second pole segment (A) to the installed segment. Overlap the second section behind (not on the inside/concave side of the pole) by 5 holes. Using the provided hardware (B, C, D), join the poles together at the end of each post section with two nuts, bolts and 4 washers (the nuts should be on the outside/back of the post.) There should be 3 holes between the two bolt assemblies. (see diagram at left).

3. Repeat with the remaining pole segment and hardware.

18"